INSTALLATION GUIDE - ASSEMBLED

FOR ALL DIRECT BURIED POLES / STEMS

Solar Bollard® EST. 2003
Smart by Design - Powered by Nature
Lighting

Congratulations on purchasing your

SBL2 / SBLV2 SERIES



Follow Link for
Online Warranty Registration

Warranty Submission Form

CONFIRM BEFORE YOU INSTALL

Note: Battery is pre-connected when supplied.

Confirm with the supplier of Solar Bollard Lighting® products prior to commencing installation, that a **"Project Location Design Assessment" (PLDA)** was undertaken and completed prior to delivery.

The **"PLDA"** applies a 'Power In vs. Power Out' design equation, based upon the geographical location's sunlight profile during winter solstice (longest night of the year), and other design factors including but not limited to:

- available Peak Sun Hours (PSH)
- varying shading levels across the project site
- seasonal, environmental, or other location dynamics:
  - snowfall
  - monsoonal rains
  - potential for flooding (submersion)
  - proximity to ocean

Once completed, the correct product series and power model for each specific installation point throughout the entire project site would have been accurately selected ensuring a minimum:

- 4+ nights battery autonomy (no solar input)
- solar co-efficient of >130%
- consistent illumination when lighting to your required compliant lighting code/standards

This will then ensure a fit-for-purpose, reliable, and long life-cycle lighting outcome is achieved.

AN INCORRECT POWER SELECTION WILL AFFECT WARRANTY TERM

Note:
If any variables as listed above are found at site of installation not discussed prior to delivery of your solar bollard light/s, **immediately contact your Solar Bollard Lighting® product supplier prior to commencing installation** to discuss any product changes that may be required to ensure operational parameters meet the Solar Bollard Lighting® Warranty T&C's.

© Key Wholesalers Pty Ltd t/a Solar Bollard Lighting- All rights reserved

INSTALLATION INSTRUCTIONS

BEFORE INSTALL: DIAL BEFORE YOU DIG

Ensure:
"Anchor Bolt" is installed prior to burying into concrete.



STEP 1 **DIG HOLE**
Use shovel, post hole digger, or auger.

Hole Depth Required Based on Pole Length:

Model	Total Hole Depth	Pole in Ground	Installed Height with Solar Light
1140DB	400mm/15.7"	300mm/11.8"	1005mm/40"
1340DB	400mm/15.7"	300mm/11.8"	1205mm/47"
1790DB	550mm/21.6"	450mm/17.7"	1505mm/59"
2440DB	700mm/27.5"	600mm/23.6"	2005mm/79"
3040DB	800mm/31.5"	700mm/27.5	2505mm/99"
3640DB	900mm/35.4"	800mm/31.5"	3005mm/118"

GOOD SOIL HOLE SIZE REQUIRED:
3 x pole diameter Ø115mm/4" = Ø345mm/13.5"

POOR/SANDY SOIL HOLE SIZE REQUIRED:
A tapered hole lower base (Ø450mm- Ø500mm) will be required to prevent bollards being removed/stolen.



STEP 2 **ADD 100MM OF DRAINAGE GRAVEL**

STEP 3 **INSERT POLE/STEM**
Ensure centre of hole and sits on top of Drainage Gravel

If using Asymmetrical Light Distribution products follow instructions on the right ➡

STEP 4 **ADD CONCRETE INTO HOLE SLOWLY**

STEP 5 **USE A DIGITAL OR SPIRIT LEVEL**
Use a digital or spirit level to ensure pole/stem is vertical by checking two pole/stem sides. Bracing if required can be used to stop movement and ensure pole/stem stays vertical whilst concrete sets.

REMOVE DOME COVER WRAPPING FOR LIGHT TO ACTIVATE

FOLLOW BELOW INSTRUCTIONS IF USING AN ASYMMETRICAL LIGHT

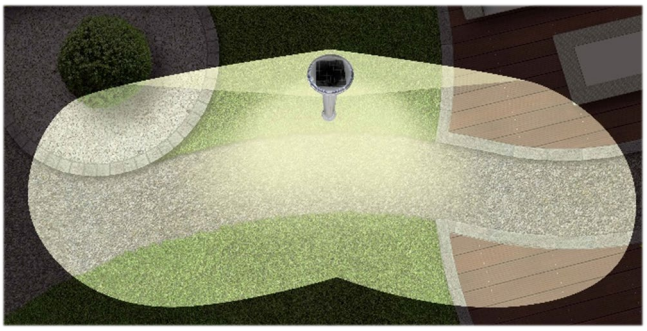

Above image shows actual centre position of luminaire to achieve even Asymmetrical Light Distribution.

To ensure even asymmetrical light distribution

- centre of luminaire LED chips must face directly across area to be lit.
- solarbollardlighting.com moulded into the top dome cover should always be left of centre when standing on the pathway.
- A **Red** ● will be applied to help centre alignment with the actual mounting hole.



Top dome cover has **solarbollardlighting.com** moulded into it and should always face left of centre to the surface area being illuminated to keep an aesthetic uniformity when installing all lights throughout the project.

Remove all Red ● once positioning has been completed.

© Key Wholesalers Pty Ltd t/a Solar Bollard Lighting- All rights reserved